

NEW SERIES

 **LIGHTLIFT 20.10**

PERFORMANCE III S

 **Hinowa®**

HIGH PERFORMANCE
AND COMPACT
TRACKED AERIAL
PLATFORM



230 kg
capacity !


www.hinowa.com

DISTINCTIVE FEATURES

- 230 kg capacity for the whole working area
- Wide working diagram: 20 m working height and 9.7 m continuous outreach with flush with the wall trajectory
- Wide range of motorizations available
- Speed and precision of the movements



PERFORMANCE III

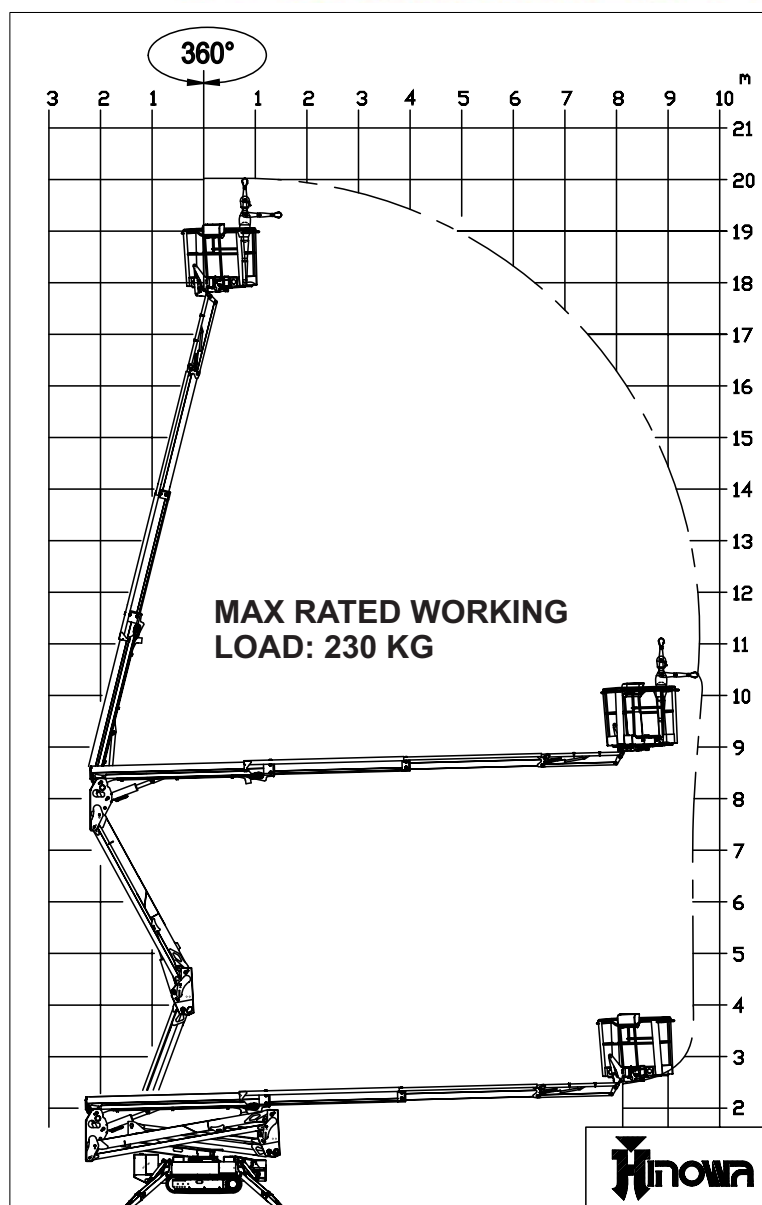

CAPACITY
230 kg

MAX WORKING HEIGHT



20,15 m

MAX HORIZONTAL WORKING OUTREACH



9,70 m

TRANSPORT LENGTH



5,01 m

TRANSPORT LENGTH WITHOUT BASKET AND ROTATED SUPPORT



4,50 m

TRANSPORT HEIGHT



1,99 m

STANDARD CAGE DIMENSIONS



1335x690xh.1100 mm

WEIGHT WITHOUT FUELS AND OIL



2800 kg / 6172.94 lb
(with petrol engine)

TOTAL OPERATING WEIGHT



2880 kg / 6349.31lb
(with petrol engine)

THERMIC ENGINE AVAILABLE



- Honda iGX440-12,7HP
3600 rpm
- Perkins 402.05-14HP
3600 rpm

ELECTRIC MOTOR



2,2kw-230V-50Hz
(110 optional)
1500rpm


CLOSED MACHINE WIDTH



795 / 1095 mm

LITHIUM 100

ELECTRIC MOTOR WITH LITHIUM BATTERIES
OPTIONAL 100Ah / 72V

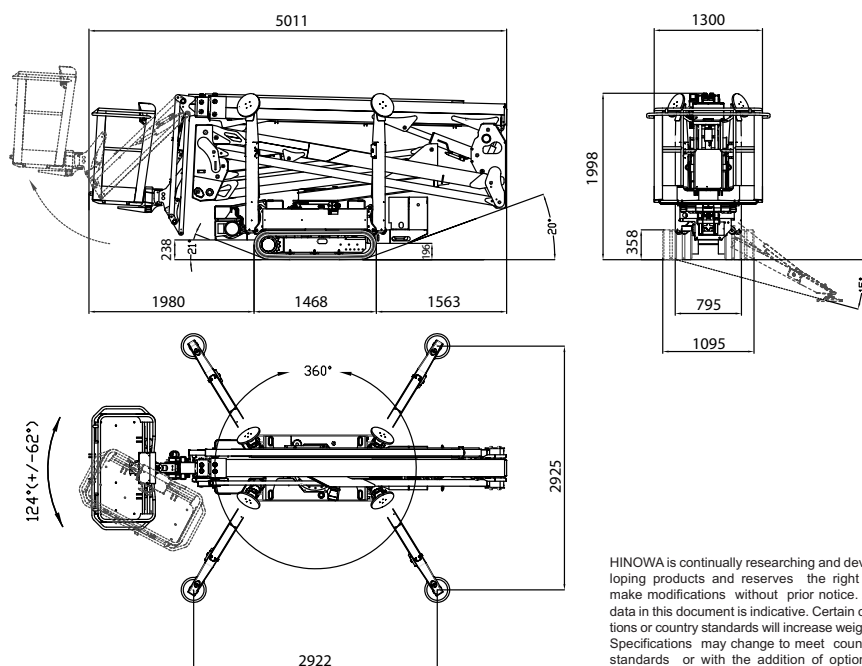

HINOWA is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

DL05321013



IPAF CE

Hinowa

HINOWA SPA
Via Fontana • 37054 NOGARA • Verona • Italy
Tel. +39 0442 539100 • Fax +39 0442 539075
info@hinowa.com
www.hinowa.com